

## **STUDY OF CAPACITOR LEAD CUTTING MACHINE**

**Vekhande Ketan<sup>1</sup>, Patil Pranit<sup>2</sup>, Sahane Dipak<sup>3</sup>, Patil Vaibhav<sup>4</sup>,**

**Prof.D.D.Patil<sup>5</sup>**

*1, 2, 3,4 B.E.Mechanical Scholar. B.V.C.O.E&R.I. Nashik (India)*

*<sup>5</sup>Head of Mechanical Dept. B.V.C.O.E&R.I. Nashik (India)*

### **ABSTRACT**

*To understand the application and involvement of automation in conventional capacitor cutting machine in manufacturing. A cutting machine is available in various shapes and sizes with small hand-held power cutting system and to bench mounted and finally floor mounted models. This paper includes the type of cutters and shop formulas for setting up each operation. Safety plays a critical part in any operation involving power equipment. This paper also includes procedure for maintaining and proper setting of the work and methods of selecting various tools and object holding devices to get a job done safely without causing damage to the equipment, workers or somebody nearby*

### **I. INTRODUCTION**

This chapter describes the company information, background, problem description and goal for this. It also describes the disposition of the report.

### **II. LITERATURE REVIEW**

- In 'Kalash Electronics' the method now used is manually and semi-automatic which is inaccurate ,time consuming and rejection rate of capacitor is high .
- In 2014 the rejection rate of capacitor was 22% of the total production .it was due to the inaccuracy of the cutting mechanism.
- The machine now used works on the principal of shear stress. A horizontal slit is provided over a rotor which acts as a cutter. The wire to be cut is drawn through the slit and is fed to the rotor. The rotor cuts the wire and it is collected in the collector.

Disadvantages:

- The wires cuts are inaccurate and dislocation of lead in the slit is frequent.
- Production rate is low.
- Rejection rate is high.
- Time consumption is more



**Semi automatic machine**


### **III. OBJECTIVE**

- Automation is essential in every industry in order to increase the productivity and quality.
- In 2014 the rejection rate of capacitor was 22% of the total production .it was due to the inaccuracy of the cutting mechanism.
- So, it is very essential for 'Kalash Electronics' to automate the system to increase the productivity and reduce the rejection rate.
- Also the production cost will be reduce


### **IV. FLOW CHART OF WORK PROJECT**

Steps followed for the whole processing of Capacitor Lead Cutting Machine is given below. These steps gives way about how work is to be carried out in systematic way. It is standard process of describing how it is done in the simplest manner.


**Design of capacitor lead cutting mechanism**




**Select Standard part**



**Manufacturing each component and construct the setup**



**Conduct the experiments**



**Conclusion**

**Flowchart of project work**

## **IV. METHODOLOGY**

### **4.1 Design**

Design consists of application of scientific principle, technical information, and imagination for development of new mechanism to perform specific function with maximum economy and efficiency. Hence careful design approach has to be adopted. The total design work has been split into two parts.

System design

Mechanical design

#### **System Design**

System design is mainly concerns the various physical constraints and ergonomics, space requirements, arrangement of various components on frame at system, man-machine interaction, no. of controls, position of controls, working environments, of maintenance, scope of improvement, weight if machine from ground level, total weight of machine and a lot more. In system design we mainly concentrated on the following parameter:-

#### **System selection based on constraints**

Our machine is used in small-scale so space is major constrain. The system is to be very compact so that it can be adjusted in small space.

#### **Arrangement of various ingredients**

Keeping into view the space restrictions all components should be laid such that their easy removal or servicing is possible. Every possible space is utilized in component arrangements.

#### **Man machine interaction**

Friendliness of machine with the operated that is operating is an important criterion of design.

## Chances of failure

Losses incurred by owner in case of any failure are important criterion of design. Factor of safety while doing design should be kept high so that there are less chances of failure. Moreover periodic maintenance is required to keep unit healthy.

- Servicing facility

Layout of components should be such that easy servicing is possible. Those which require frequent servicing can be easily disassembled.

- Scope of further improvement

Arrangement should be provided in such way that if any changes have to be done for future scope for improving efficiency of machine.

- Height of machine elements from ground

All the elements of the machine should be arranged to the height from where it is simple to operate by operator. Machine should be little higher than the waist level, also enough clearance should be provided from the ground for cleaning purpose.

- Weight of machine

Total weight depends on the selection of material of all components as well as their dimensions. Higher weight will result in difficulty in transportation; it is difficult to take it to workshop because of more weight

- Mechanical Design:

In mechanical system the components are listed down and stored on the basis of their procurement, design in two class namely.

- Designed parts

- Parts to be purchased

Mechanical design phase is very important from the view of designer as whole success of project depends on the correct design analysis of the problem.

Many preliminary alternatives are eliminated during this stage. Designer should have adequate knowledge about physical properties of material, load stresses and failure. He should identify all internal and external forces acting on machine parts. These forces may be categories as,

- Dead weight forces
- Friction forces
- Inertia forces
- Centrifugal forces
- Forces generated during power transmission etc.

Designer should forecast these forces very accurately by using design equations. If he does not have sufficient information to estimate them he should make certain practical consideration based on similar conditions which will almost satisfy the functional needs. Considerations must always be on the safer side. Selection of factors of safety to find working or design stress is another puissant step in design of working dimensions of machine elements. The correction in the theoretical stress values are to be made according in the form of loads, shape of parts & service requirements Selection of material should be made according to the condition of loading shapes

of products environment conditions & desirable properties of material supply should be made to minimize nearly adopting proper lubrication method.

## 4.2. Design of Shaft

A shaft is a rotating element which is used to transmit power from one place to another. The power is delivered to the shaft by some tangential force and the resultant torque set up within the shaft permits the power to be transferred to various machines linked up to the shaft. In order to transfer the power from one shaft to other, the various members such as pulleys, gears, etc are mounted on it. These members along with the forces exerted upon them causes the shaft bending.

The shaft usually cylindrical, but may be square or cross shaped in section. They are solid in cross section but sometimes hollow shafts are also used.

Material used for shaft

- It should have high strength.
- It should have good machine ability.
- It should have good heat treatment properties.
- It should have high wear resistance properties.

The material used for ordinary shafts is carbon steel of grades 40C8, 45C8, 50C4 & 50C12. Also M.S. & En8 can be used.

Stresses in shafts

- Shear stress due to transmission of torque. (i.e. due to tort tonal load.)
- Bending stresses (tensile or compressive) due to the forces acting on the machine elements like gears, pulleys etc. as well as due to the self weight of the shaft.

The shafts are designed on the following basis.

Strength & Rigidity:

The following cases may be considered.

- Shaft subjected to twisting moment or torque only.
- Shaft subjected to bending moment only.
- Shaft subjected to combined bending twisting moment.
- Shaft subjected to axial loads in addition to combined torsional & bending.

**Components used:**

- 3/2 pneumatic valves- 3Nos
- Pneumatic cylinders- 3 Nos
- Pressure regulator – 3 Nos
- 3/1 tab- 1 No
- Timer -1 No

## V. STEPS FOLLOWED

a) Design of Capacitor Lead Cutting Machine.

- b) Design of base plate and supporting plate, guide ways and moving plate
- c) Selection of various pneumatic components and accessories from different catalogues. d) Schematic 2D drawing of Capacitor Lead Cutting Machine.

## VI. CALCULATIONS Design of Capacitor Lead Cutting machine by using Pneumatic Actuator.

Useful input data:-

Force on base frame (F) = 78.48 N

Length of base plate= 560 mm

Length of supporting plate=146 mm


Width of base plate (b) =146 mm

Thickness of base plate= 10 mm

Thickness of supporting plate= 16 mm


There are various Pneumatic Actuators used for various purposes but this is special purpose machine which is only used for base frame having 78.48 N force

Design:

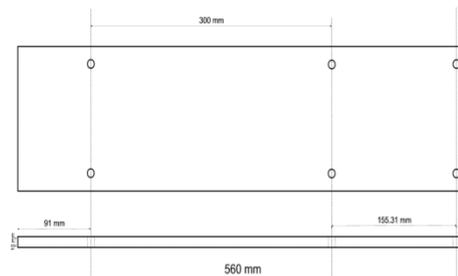

Drawing: Base Plate  
Scale: 1:1  
Project: Capacitor Lead Cutting Machine

### Base plate

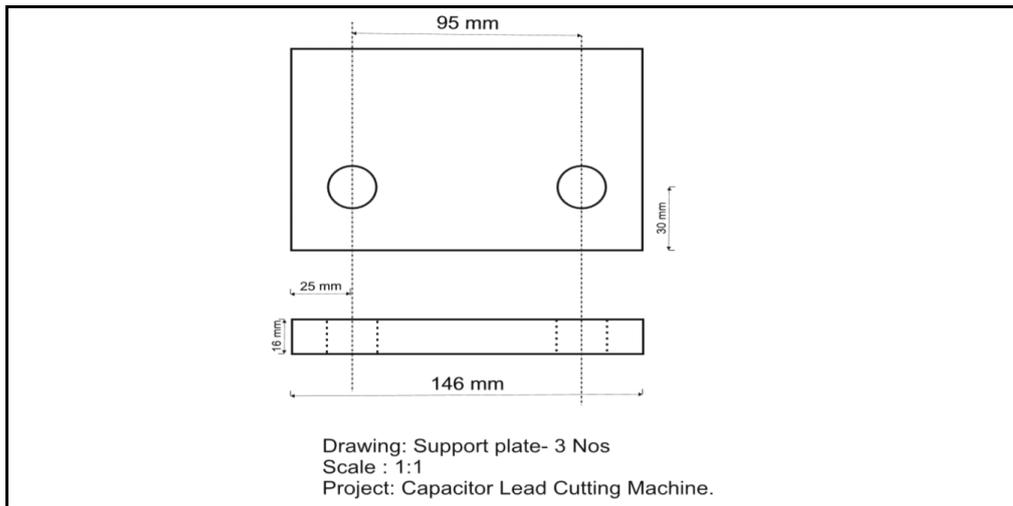

### Support plate

Selection of material for frame:

150

Assumptions 600

(Area of frame =  $600 \times 150 \text{ mm}^2$ )

Total load on frame is about 8kg

$F = 8 \times 9.81 = 78.48 \text{ N}$

This load is applied at the centre as shown in fig. R1300 300 R2

From fig.

$R1 + R2 = F$

And Taking moment at R1

$\Sigma M_{R1} = 0, \therefore F \times 300 - R2 \times 600 = 0, \therefore 78.48 \times 300 - R2 \times 600 = 0$

Therefore, Reaction Force at R2

$R2 = 39.24 \text{ N}, \therefore R1 + 39.24 = 78.48$

Reaction Force at R1 = 39.24 N

Moment about point B,  $M_b = 39.24 \times 300 = 11772 \text{ N-mm}$

$Y = b/2 = 16/2 = 8 \text{ mm}$  (as b=width)

$I = bd^3 / 12 = 16 \times (20.1)^3 / 12 = 10827.468 \text{ mm}^4$

Stress on frame,

$\sigma = M_b y / I = (11772 \times 8) / 10827.468 = 8.697 \text{ N / mm}^2$

$\sigma = S_{yt} / \text{fos}$

Therefore,

$S_{yt} = \sigma \times \text{fos} = 8.697 \times 10 \dots\dots\dots$  (assuming fos = 10)

$= 86.97 \text{ N / mm}^2$

Selecting material GCI 15 having Tensile strength (min) =  $150 \text{ N / mm}^2$  Therefore all assumptions are in safer state.



## VII. WORKDONE



**Assembly of base frame**

## VIII. CONCLUSION

In this study the application of machine improves the cutting quality of the work pieces. The major benefit is high accuracy. The accuracy increases because the job loading and unloading is done automatically. The feed rate is controlled by application of pneumatic sensors. The controlling of whole process is done with application of electrical as well as pneumatic energy. We also conclude that the use of automation resulting into less human interaction with high production rate.

## REFERENCES

- [1] J.P. Den Hartog ,Advanced strength of materials (McGraw-Hill, New York, 1952), TA 405D4, 1952.;Author Name, Conference Name, year etc
- [2] Machine design R.S.Khurmi
- [3] Workshop technology R.K.Jain.
- [4] Machine tool design handbook.
- [5] P.S.G. Design Data Book
- [6] Pneumatic application and reference hand book by BIMBA MANUFACTURING COMPANY.
- [7] "Total Automotive Technology " written by Anthony E Schwaller