

EFFECT OF COOLANT ON SURFACE ROUGHNESS AND TOOL LIFE DURING TURNING

**Wavdhane Yogesh G¹, Sonavane Prasad R², Pawar Umesh A³,
Prof.Firoz Pathan⁴**

*^{1, 2, 3} Scholar Te Mech, ⁴Assistant Prof. Mech Engg. Department, B.V.C.O.Engg & Reaserch Institute,
Nashik, Pune University,(India).*

ABSTRACT

The major wishes of machining area unit high material removal rate, wise surface finish and low tool wear. These objectives are achieved by reducing tool wear exploitation correct cooling system of the tool throughout machining. The tree cutting fluids chosen where web, oil soluble oil and semi-synthetic cutting fluids the experiment take a glance at where designed to evaluate the performance of the fluids at varied cutting velocities of twenty,40 and 60m/min and feed rates of zero.05,0.06 and 0.07 mm/tooth. The results were measured in vacuum flask of average surface roughness of the machined work piece, the cutting forces and so the foremost flank wears. In further, the resultant chip formations were in addition discovered. Analysis of the result has shown that typically, web oil had performed the only in law cutting velocities and feed rates. On the alternative hand, soluble oil gave the bottom cutting forces and flank wears at high cutting velocities and feed rated as compared to neat oil and artificial cutting fluid. it completely was discovered that performance of soluble oil does not drastically modification with variation to the cutting velocities and feed rates. Thus, the choice of soluble oil would be most applicable for general machining usage .with acceptable machining parameter selection water mixed cutting fluids (soluble oil and semi synthetics) perform comparatively well to delivered loss surface roughness results therefore ,this can be an inexpensive various to be utilized in industrial production processes. Meta cutting fluids changes the performance of machining operations because of their lubrication, cooling and chip flushing. The use of cutting fluid usually causes economy of tools and it becomes easier to remain tight tolerances and to require care of labor piece surface properties whereas not damages. However, the quality kinds and ways in which of the applying of cutting fluid area unit found to decrease effectively the need increase in cutting speed and feed once the cutting fluid cannot properly enter the chip-tool interface to relax and lubricate as a result of bulk plastic contact of the chip with the tool rake surface. Besides that, obtained in high production machining the cutting fluid would possibly cause premature failure of the tool by fracturing do to shut curling of the chips and thermal shocks. Because of them some alternatives has been needed to scale back these problems.

Keywords: High Pressure coolant; Surface Finish; Roughness Average.

I. INTRODUCTION

The primary operate of the cutting fluids in metal machining operations is to function a fluid similarly as a lubricator. It's typically united that the applying of cutting fluids will improve the tool life and leads to sensible

surface end by reducing thermal distortion and flushing away of machined chips. The goal altogether typical metal-removal operations is to lift productivity and cut back prices by machining at the best sensible speed together with long tool life, fewest rejects, and minimum time period, and with the assembly of surfaces of satisfactory accuracy and end choosing the correct cutting fluid is as necessary as selecting the acceptable machine tools, tooling, speed and feed as a result of it will forever have an effect on the output parameters. In addition, the flexibility of the cutting fluid to penetrate into the cutting zone may be a essential issue; otherwise, the operate of cutting fluid becomes useless. the employment of cutting fluid permits higher cutting speeds, higher feed rates, larger depths of cut, long tool life, faded surface roughness, enhanced dimensional accuracy, and reduced power consumption. Cutting fluids may be applied mistreatment varied strategies. The flooding methodology is that the most ordinarily utilized in that a high volume flow is applied and floods the complete machining Invited paper2area, effectively removing the warmth generated from the machining method. However, improved production potency and revised laws within the machining business favors the reduction of cutting fluid usage. it absolutely was reportable that operators UN agency area unit of times exposed to cutting fluids area unit vulnerable to expensive cases of activity eczema and different skin diseases such sensitization to specific irritants, oil acne, and hyper pigmentation. Additionally, improper disposal of used cutting fluids might cause serious impact to the atmosphere through contamination of the soil, water and air. More over, cutting fluid usage will account for 7-17% of the overall production prices through its procural, storage, maintenance and disposal. Lowest amount lubrication (MQL) encompasses varied techniques during which the cutting fluid is applied in terribly little quantities throughout machining. Associate in nursing example of Associate in Nursinging MQL technique is that the mist fluid application. During this methodology, terribly little droplets of the cutting fluid area unit spread in a very gas medium, typically air, and applied at the cutting zone. In those studies, it absolutely was shown that MQL systems had comparable machining performance with flooding applications in turning and drilling processes. Application of the cutting fluid within the type of slender periodical jet streams was planned by A. S. Vadarajanet. All Usage of such Associate in Nursinging MQL system within the turning of hardened tool steels had shown higher machining performance in terms of cutting force, tool life and surface end as compared to flooding and dry machining. Custom-made this system for the edge of hardened steel with inorganic compound mills by applying high speed and slender periodical jet at the speed of two ml/min. similar results favoring the MQL technique over each flooding and dry machining was obtained showing comparable machining performance. Previous studies have focused on the comparison between the varied forms of cutting fluid delivery systems and have over that MQL systems area unit appropriate replacements for existing flooding techniques. Later on, there's a desire to specialize in the optimization of the MQL system. One important space is that the choice of cutting fluids, a subject that is nevertheless to be totally self-addressed. Thus, this analysis can specialize in the analysis of cutting fluids utilized in the periodical jet MQL system.

II. FUNCTION OF COOLANT

Cutting fluids are employed in metal cutting primarily for 2 reasons:

1. To scale back friction at the tool work and power chip contact zones-lubricating action.
2. To dissipate the warmth generated throughout the cutting method –cooling action.

In addition, agent it conjointly helps in laundry away the chips from the cutting zones and in lubricating a number of the moving components of the machine. The lubricating action of the agent reduces forces, will increase tool life reduces the tendency to make designed – up-edge and improves the surface end .Lubricating action of agent or cutting fluid is primarily thanks to the formation of an occasional shear strength film within the metal surface which might be simply sheared .the formation of such film takes time. Therefore, lubricating action of agent is a lot of necessary than its physical properties. Additives are when other to the fluid s to enhance their lubricating properties. Cooling the work piece conjointly helps take away the warmth generated throughout cutting and thence in retentive the strength of the tool .it conjointly helps work handling easier .almost all the fluids, water primarily based fluids are the foremost economical for cooling as a result of their high heat and thermal physical phenomenon. Compare to its, water primarily based fluids are 2 to 3 times quicker .but water s doubtless to cause corrosion of machine components.

Anti corrosive additives are mixed with water supported agent to regulate this corrosive action

III. BENEFITS OF COOLANT

Coolant will offer the subsequent advantages particularly in difficult work piece materials

- a) Higher machining security
- b) Consistent machining method.
- c) Fewer machine stoppages
- d) Higher part quality,
- e) Improved surface end
- f) Higher chip management shorter machining times
- g) Quicker cycle time
- h) Higher utilization of machine capabilities
- i) Increased tool life
- j) These advantages may also be applied edge and drilling ideas

IV. PROPERTIES OF COOLANT

The properties of the agent is also classified as,

- (a)Performance properties
- (b)Service properties.

Performance properties are those that contribute to reduction in forces, improvement within the tool life, higher surface, and dimensional stability associate degreed an economy in production.

Service properties of the agent associated with their impact on the machine, work piece and operator and their stability. The principal service properties their as follows:

- 1.No un well impact on the traditional lubrication.
- 2.No deterioration of paint or end lubrication of the machine.
- 3.No oxidization or corrosion of the machine or work piece.
- 4.No cyanogenic or alternative morbid impact on operator.

5.Easy flushing and detergent action on the machine sump the fluid system.

6.No foaming, fogging or misting.


7.Low cost.

8.Optimum service life.

V. TYPES OF COOLANT

5.1 Types Of Coolant: various type of coolant is as follows,

Coolant

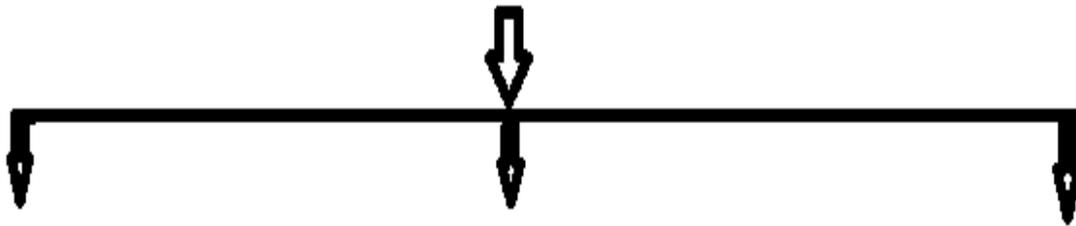

GASEOUS TYPE

SYNTHETIC COOLANT

LIQUID TYPE

- **Water**
- **Fatty oil**
- **Straight mineraoil(neat oil)**
- **Cutting oil**

Various type of coolant we are used in day today life, this type of coolant lattes see in one by one:

5.2 Gaseous Type

One of the foremost issues in agent application is that the problem for the agent to truly reach the cutting zone throughout machining. The effectiveness of the agent will be considering with competence increased by supply the agent within the style of gas. Mist is that the most ordinarily used foamy fluids within the style of agent. In mist cooling system, compressed gas is employed to atomize the agent and carry it to the purpose of the cutting within the types of mist. Gases like greenhouse emission, Freon and argonon are used for special applications. This agent fluids performed lubricating, cooling flushing action. Gaseous application of agent significantly will increase the effectiveness of the agent however is costlier compared to alternative strategies

5.3 Soluble Oils

Soluble oil contains:

- Mineral Oil. Provides lubricity
- Emulsifier. Breaks oil into small globules
- Rust inhibitor. Since water can cause rusting.
- Bactericide. To control the growth of anaerobic bacteria which causes foul smell and renders oil useless.
- "EMULSION"

Oil does not dissolve in water. Oil is suspended in water in the form of tiny globules. Breaking of the oils into tiny particles is done by a chemical known as "Emulsifier". This medium of oil in water is known as an

"Emulsion". "Specific heat" (ability to absorb heat) and thermal conductivity (ability to dissipate heat) of water is much better than Oil whereas "lubricity" (ability to reduce "Friction") can be provided only by oil. In a metal cutting operation using an emulsion" oil" provides lubricity and "water" does the cooling.

5.4 Synthetic Coolant

Synthetic oils do not contain mineral oil.

Instead they contain some synthetic chemicals as substitutes.

Its main advantages are: They are not affected by bacterial growth. "Life" of synthetic coolants is very high..

They are capable of forming emulsions in hard water.

• Limitations of Synthetic Oils are:

1) They provide very poor lubricity.

2) pH value is much higher around 9.5.

3) They are used in dilutions around 1:60.

Arbitrary topping of emulsion and increase in this dilution can result in "component trusting".

Synthetic coolants peel of poor quality epoxy paints on the machines.

Synthetic coolants have a very high detergency property. This results in collection of large quantities of muck and dirt in the coolant pump. Unless the filtering mechanism is very good, this property can lead to a lot of undesirable machining conditions.

Synthetic coolants have a tendency to foam. If the rate of coolant flow for a Particular requirement is very high, excessive foaming can be caused. This Would result in poor surface finish and reduced tool life.

5.5 Applications For Synthetic Coolant Usage

Carbide grinding with diamond wheel.

Very sophisticated CNC machines with low stock removal and no operator contact with coolant .Ordinary commercial grinding where finishes not very critical.

VI. STRAIGHT CUTTING (NEAT) OILS

Straight Cutting Oils or Neat Oils are petroleum based mineral oils reinforced with "Extreme pressure" additives (EP additives).For applications where the speed of the tool is very low, depth of cut taken is high, cutting pressures are high, the primary role of coolant is to provide: Adequate lubricity so that friction is reduced. Prevent chip welding of the tool of edge build up. Wash away the chips from the cutting zone. Lubricity is provided by the mineral oil. Commonly used EP additives are chlorine and sulphur. These additives form a low shear strength chloride or sulphide coating over the tool rake preventing chip welding. Choice of one or both of these additives is governed by the nature of the application and the material that is being machined.

6.1 Important Properties Of Neat Oils

• **Viscosity:** The correct viscosity is very important to give adequate lubricity and wash away the chips from the cutting zone.

. **Flash Point:** Neat oil application generates enormous amount of friction and cutting pressures. If the quantity of coolant and the viscosity is not optimum, The friction reduced would not be sufficient. This would lead to excessive heat being generated and risk of fire. Therefore, the flash point should be high enough to provide adequate factor of safety against chances of fire.

. **The EP package:** Depending on the material that is being machined and the Severity of the operation, this has to be decided.

. **Wetting agents:** To provide adequate lubricity in the cutting zone.

VII. SURFACE ROUGHNESS GEOMETRY

No surface is utterly smooth, however the higher the surface quality, the longer a product usually lasts, and also the higher it performs. Surface roughness is a crucial live of product quality, since it greatly influences the performance of mechanical components in addition as cost. Surface roughness has an impression on the mechanical properties like fatigue attributes of components like friction, wear, lightweight reflection, heat transmission, lubrication, etc. Surface end, by definition, is that the allowable deviation from a wonderfully flat surface that's created by some producing processes. Whenever any method is employed to manufacture apart, there'll be some roughness on the surface. This roughness is caused by a cutter creating small grooves on the surface or by the individual grains of the wheel every cutting its own groove on the surface. it's laid low with the selection of tool, speed of the tool, environmental conditions, and undoubtedly by what material ar operating with. Even once there's no machining concerned, as in casting, molding, the surface of the mould can have surface deviation, that successively are transferred onto the half. notwithstanding it may produce a mould that was utterly flat, the cooling method and thermal properties of the fabric would cause surface imperfections. []

7.1 Roughness Average (Ra)

Ra is the universally recognized parameter of roughness. It is the arithmetical mean of the departures of the profile from the mean line. Statistically Ra is a very stable, repeatable parameter as shown in figure 2. The average roughness is by far the most commonly used parameter in surface finish measurement. The earliest analog roughness measuring instruments measured only Ra by drawing a stylus continuously back and forth over a surface and integrating (finding the average) electronically. It is fairly easy to take the absolute value of a signal and to integrate a signal using only analog electronics. Ra is used in the automotive and other metalworking industries to specify surface finish of many a type of components ranging from cylinder bores to brake drums [10]

$$Ra = (h_1 + h_2 + h_3 + \dots + h_n)/L$$

Figure 2:

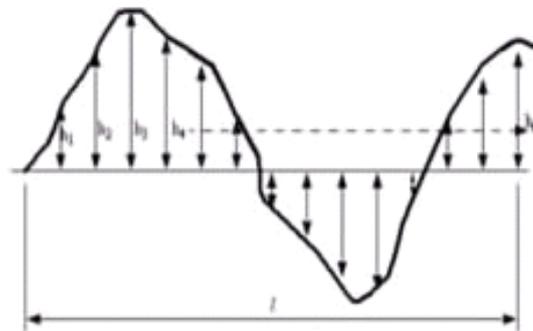


Figure 2: Roughness Average (10)

Fig: 7.1 Roughness Average

VIII. Tool Wear And Tool Life

During machining the cutting edge of a tool gradually wears out so that intimate tool ceases to cut efficiently or may even fail completely. Machining with a worn tool leads to increased tool forces, higher interface temperature, poorer surface finish, less accurate dimensions and noisier cutting action. When the wear reached a certain stage the tool must be reground or replaced by a new tool if machining is to be continued satisfactorily. Wear on the tool is observed in two places; on the tool flank called flank wear and on the rake face called crater wear.

8.1 Tool Life:

R_a is the universally recognized parameter of roughness. It is the arithmetical mean of the departures of the surface from the mean line. Tool life may be defined as the effective time interval between resharpening of tool. It is used as a measure of the performance of a tool material or the machinability of a work material. It is also used as a criterion for determining the effect of cutting conditions. No single definition of the tool life has been found universally acceptable. The common methods of specified tool life are:

- Machine time
- Actual cutting time.
- Volume of metal removed per cutting edge.
- Number of identical pieces machined.
- Length of work cut per cutting edge.
- Equivalent cutting speed.

Life of tool is said to be over to have failed due to any of the reasons given below

Flank wear: when the flank wear reaches a specified value, a value of 1.58 mm for high speed steel tools and 0.76 mm for carbide tool is to be used.

- Crater wear: as mentioned earlier failure of tool due to cratering is measured in terms of the ratio of crater depth. The value of this ratio generally used for measuring tool life 0.6 for high speed tool and 0. For carbide tools
- Nose wear.
- Thermal cracking caused by thermal cyclic stresses.

8.2 Factors Affecting Tool Life:

Practical variables that influence tool life include

- Cutting speed.
- Dimension of cut.
- Tool material and geometry.
- Work material.
- Nature of cut.
- Rigidity of the machine tool work system.
- Coolant used.

8.3 Effect Of Tool Material:

Machining with steel and tool steel tool is typically through with neat oil or water soluble oil relying upon the tactic. Carbide, ceramic and diamond tools are used with neat cutting oils at low speeds but at higher speeds these tools got to be used with soluble oils.

Care got to be taken to use the cutting fluid at intervals the case of chemical compound tools be caused they are susceptible to crack with unequal cooling.

IX. CONCLUSION

Neat oil gave the bottom cutting forces and flank wears at low cutting velocities and feed rates as compared to soluble oil and artificial cutting fluid. Soluble oil gave the bottom cutting forces and flank wears at high cutting velocities and feed rates as compared to neat oil and artificial cutting fluid. With correct machining parameter choice, water-mixed cutting fluids (soluble oil and semi synthetic) performed relatively well to deliver low surface roughness results. Thus, this will be a cheap alternative within the choice method.

REFFERNCES

- [1] International Journal of Innovative Research in Science, Engineering and Technology "EFFECT OF HIGH PRESSURE COOLANT ON SURFACE FINISH IN TURNING OPERATION" *Volume 2, Issue 7, July 2013*
- [2] PERFORMANCE EVALUATION OF DIFFERENT TYPES OF CUTTING FLUID IN THE MACHINING OF AISI 01 HARDENED STEEL USING PULSED JET MINIMAL QUANTITY LUBRICATION SYSTEM A. Hamdan1, M. Fadzil1, K.A. Abou-El-Hossein2, M. Hamdi1
- [3] An Experimental Investigation on Effect of Cutting Fluids in
- [4] Turning with Coated Carbides Tool Effect of High-Pressure Coolant on Temperature, Chip Force, Tool Wear, Tool Life and Surface Roughness in Turning AISI 1060 Steel.