

E-SPIN-ENERGY SAVING ROUTING PROTOCOL FOR WIRELESS SENSOR NETWORK UTILIZING SLEEP MODE PECULIARITY OF SENSOR NODE

Ashru Tuplondhe¹, Prof.Vijay Shelake²

*¹Dept of Computer Engineering, Alamuri Ratnamala Institute of Engineering and Technology
Thane, (India)*

*²Dept of Computer Engineering, Yadavrao Tasgaonkar College of Engineering & Management,
Karjat, (India)*

ABSTRACT

Data transmission in wireless domain is one of the major challenges in Wireless Sensor Networks (WSN). Efficient use of energy and time is major field of research in Wireless Sensor Networks; different routing protocols have been proposed to overcome these problems. In this paper we proposed a modified version of SPIN protocol named E-SPIN and compared its performance with traditional SPIN-BC protocol using broadcast communication. We simulate it from two aspects using C and MATLAB: The consumption of energy and the number of alive nodes in the sensor networks. The simulation result shows that not only the problem of “Blind Forwarding” and “Data Inaccessibility” in SPIN those have been solved, but also extended the network life time and quick response to request is made.

Keywords: *Blind Forwarding, Data inaccessible, Routing protocols, SPIN, Wireless Sensor Network*

I. INTRODUCTION

Wireless sensor network is used widely in a variety of applications such as public safety, environmental monitoring, medical, home and office security, transportation, and military [1] [2]. WSN uses SPIN protocol data routing [3]. Future of mankind's life will be affected tremendously by WSN - America's “Technology Review” magazine.

Sensor networks are application dependent & Sensor nodes are specially designed for measuring the environment condition. Routing protocols and sensor network applications uses SPIN protocol [5] for the ideal lossless network. SPIN uses metadata for reducing the transmission of redundant data in the network making good use of resources. However, the problem of “Blind Forwarding” and “Data Inaccessible” is not fully overcome by the use of metadata. Both the problems lead to energy wastage and information blocking which must be answered.

Energy efficiency is a central challenge in sensor networks, as battery replacement is costly and often difficult in inaccessible deployment regions. Several efforts have addressed energy efficiency in sensor networks, through the design of energy saving MAC protocols, such as duty cycling protocols or low power wakeup radio protocols, and routing protocols, such as Radio energy consumption is a major component contributing to the

overall energy consumption at each node. Current MAC protocols put the radio in sleep mode while there is no data to send or receive, in order to minimize energy consumption.

Although most radios for sensor networks support multiple sleep modes, the radio sleep mode in current MAC protocols is static. Choosing a static low power mode involves an energy and delay trade off. The deepest sleep mode, which turns off the oscillator and voltage regulator, provides the lowest current draw of all low power modes. However, it also involves the highest energy cost and the longest latency for switching the radio back to active mode. In contrast, the lightest sleep mode provides a transition to active mode that is quick and energy inexpensive, but it has a higher current draw. In a low traffic scenario, it is better to use the deep sleep mode as nodes spend more time sleeping than switching back and forth between sleep mode and active mode. In a high traffic scenario, a lighter sleep mode is more suitable as the cost of switching the radio frequently into deep sleep mode would exceed the energy saving of the deep sleep mode's low current draw.

II. CONVENTIONAL SPIN PROTOCOL

SPIN is an event driven data delivery model in which the sensor node senses data and routes data throughout the network by means of negotiation. A sensor node uses three types of messages for communication [5] [6]:

- ADV- Using ADV message a node can advertise new data arrived at it containing Metadata (information of data).
- REQ- For receiving actual data , a node sends a REQ message
- DATA-It contains actual sensor information.

The SPIN family contains protocols like SPIN-PP, SPIN-BC, SPIN-RL, SPIN-EC and SPIN-MI.

Protocol	Used For
SPIN-PP	Point-to-Point communication media
SPIN-BC	Broadcast communication media
SPIN-EC	Energy Conserving
SPIN-RL	Reliable Adaptation

(These 2 are Modified version of SPIN-PP, SPIN-BC)

SPIN-MI Efficient Energy Saver

In SPIN-BC, nodes transmit data using ADV message which is received by nodes within the transmission range. After reception, each node verifies whether it has already received or requested the advertised data. If not, sends a REQ message to the broadcast address with the original advertiser in the header of the message. The original advertiser responds after receiving a REQ message from neighbor node and sends the actual data to the requesting node. Data delivery is not guaranteed in SPIN because as per the negotiation mechanism only redundant data is eliminated but it does not establish any path for data transmission. Data sensing, processing the sensed data and transmitting or receiving them between 2 nodes involves energy consumption. So in order to save significant amount of energy, one has to control the number of transmission and reception of messages.

III. THE PROBLEMS OF SPIN PROTOCOL

SPIN [7] protocol is more effective and higher energy than other protocols as it is suitable to small or medium-sized WSN that bridges other distribution environments. Before transmitting data, sensor nodes consult with each other, avoiding the emergence of explosion of information and some overlap in flooding.

3.1 “Blind Forward” Problem

DATA packets to all the neighbor nodes will be sent by the source node. An ADV message would be broadcasted to its entire neighbor nodes that have received data and DATA packets are consumed by those neighbor nodes that respond to ADV message. This process is repeated until the packets reach the destination which is repeated for all new data items leading to *Blind Forward” Problem which causes wastage of energy & unbalance of energy consumption across the network nodes.*

3.2 “Data Inaccessible” Issue

Using ADV message, sensor nodes broadcast new data arrived at it. In some cases, due to low energy, some nodes unwillingly forward the new data; and if the neighbor nodes already have the same data, they don't show any interest in receiving same data. In addition, there is a problem of imbalance of energy consumption in the WSN.

It is easy to run out of energy and failure as the nodes around sink nodes are located on the only path of reaching the sink node & are bound to take more tasks. The problem above will result in data inaccessible in lossless network. In SPIN, due to the “blind forward” problem energy wastage shortens the life cycle of the network, and reduces the network performance. Also the “data inaccessible” problem makes the network unable to collect information, and make the WSN lose the meaning of application.

IV. PROPOSED E-SPIN PROTOCOL

4.1 Initial Assumption For Network Model

The initial energy of each node is equal; node A and node B can communicate with each other, the link is symmetrical. Communication between two nodes is far away from the interference of other nodes, and power is without any constraints and nodes remain stationary. Assuming all nodes want to achieve the data, and are located on the path to reach sink nodes. Wireless signals in all directions consume the same energy, and the energy should be above threshold value (energy needed to complete all the phases), every node must be aware of threshold value.

4.2 Working Mechanism of E- SPIN

Our proposed model consists of five phases. “Hop distance Calculation” phase determine the distance of sensor nodes from sink node at the time of initialization of WSN [10]. In “Advertising Phase” sensor nodes send request to its neighbor nodes. In response to advertisement message neighbor nodes having current energy value above threshold [9] and closer to sink node in comparison of advertising node will make the request in “Requesting Phase”. In “Data Transmission” phase source node sort the requesting nodes on the bases of their energy values and node with maximum energy is selected to forward the data.

In “Sleep Mode” phase sensor nodes goes from sleep state to active state when they receive an active message packet from neighbor node. It also senses the information over a barrier value defined at the time of network initialization.

4.2.1 Hop Distance Calculation

Hop distance is measured from sink nodes [10] while the Wireless Sensor Network is initialized. Initially the sink node broadcasts *initialization* packet in the network with *type*, *nodeId* and *hopd*. Here *type* provides the information of the type of messages. The *nodeId* represents id or address of the sending nodes and *hopd* represents hop distance from the sink node. *hopd* is initially set to 1. When a sensor node receives the *initialization* packet, it memories this hop value as its hop distance from the sink node in memory. After storing the value, the sensor nodes increment the hop value by 1 and then re-broadcast the *initialization* packet to its neighbor nodes with modified hop value. Sensor nodes may receive multiple *initialization* packets from different intermediate nodes. Whenever a sensor node *b* receives *initialization* packets from its neighbor a_i , $1 \leq i \leq n$, it checks the hop distances and set the distance to the minimum, i.e.

$$\text{Min} \{ \forall h(a_i, b), i = 1, n \}$$

Where $h(a_i, b)$, represents hop distances between the nodes a_i and b and n is the no. of neighbor nodes of node b from which it receives the *initialization* packets. This process is continued until each node in the network receives the *initialization* packets at least once.

4.2.2 Advertising Phase

When a sensor node (source node) of a network has new data to send or forward, it first broadcasts ADV message to all its neighbor nodes. ADV message contains the metadata describing the properties of data to be transmitted and threshold value (T_{adv}).

4.2.3 Requesting Phase

After receiving the advertisement message ADV from source node if not in sleep mode, receiving nodes check weather their current energy values is above threshold value T_{adv} [9]. If energy value of a neighbor node of advertising node is less than threshold value then do not reply to advertisedmessage ADV and set the status to sleep mode, else if it'scurrent energy value is above threshold value then compare its hop distance (H_{nb}) and hop distance (H_{adv}) of advertising node [10]. If aneighbor node hop distance is greater than advertising node hop distance, set F_{hop} to 1, else set F_{hop} to 0. After setting flag F_{hop} check if a neighbor node have received the data before by comparing the meta data available in its memory with the metadata transmitted along with the advertising message , if same data is sent again set flag F_{data} to 1, else set F_{data} to 0 in request message and then send request message to advertising node[11] . The whole process can be summarized as follow:

- a. Receive the ADV message if not in sleep mode
 - If energy level < threshold value (do not reply and go to sleep state)
 - Else move to next step
- b. Compare hop distance
 - If $H_{adv} < H_{vcn}$ (do not reply)
 - Else move to next step
- c. Check if node already receive the data
 - If yes do not reply

- Else move to next step

d. Send request message if above condition is satisfied.

4.2.4 Data Transmission Phase

After receiving the request messages from different neighbor nodes source node separate the neighbor nodes in four lists L1, L2, L3 and L4n on the basis of their flag values. First two lists are made on the basis of flag Fhop and then the two lists are further separated into two sub list on the basis of Fdata. Arrange all four lists in descending order on the basis of energy value of nodes send along with request message [11].

Select the first element (node with maximum energy) from the list containing neighbor nodes with flag values Fhop=0 and Fdata =0, if the list is empty select the first node from list having Fhop=0 and Fdata=1 and if this list is also empty we look in the list having Fhop=1 and Fdata=0 and then list with flag value Fhop=1 and Fdata=1 if previous is empty. If no node is selected (all the list is empty) then check whether current threshold value is less than or equal to minimum energy of node. If yes network is dead otherwise, reduce the threshold value by predefined value and move to advertising phase. The whole process can be summarized as follow [11]:

- Receive the request messages from neighbor nodes.
- Filter the node with flag Fhop (0) from flag Fhop (1) in two separate lists X and Y.
- Filter the node in X with flag Fdata (0) from flag Fdata (1) in two separate lists L1 and L2.
- Filter the node in Y with flag Fdata (0) from flag Fdata (1) in two separate lists L1 and L2.
- If list L1 is not empty
Select first element in list, go to 'j'.
Else go to 'f'.
- If list L2 is not empty
Select first element in list, go to 'j'.
Else go to 'g'.
- If list L3 is not empty
Select first element in list, go to 'j'.
Else go to 'h'.
- If list L4 is not empty
Select first element in list, go to 'j'.
Else go to 'i'.
- If $\text{threshold} > \text{min_energy}$
Threshold = threshold-(predefined value)
Go to advertising phase.
Else go to j
- Forward the data to selected node.

If no request message is received in give time interval then generate an ACTIVE_PACAKET message to all the neighbor node to bring them in active state [11]. After moving to active state all the neighbor nodes decreases their THR_SLEEP by certain factor and move to advertising phase.

4.2.5 Sleep Mode Phase

Nodes can go from sleep state to active state only if following two events occur.

- Receive Active message packet from neighbor node.
- Sensed information around the environment goes over a barrier value defined at the time of network initialization.

V. PERFORMANCE ANALYSIS OF E-SPIN

The performance analysis of SPIN-BC and SPIN-MI is performed using 'C' and 'MATLAB'. The matrices used for this purpose are: (1) The Number of alive nodes in the wireless sensor networks. (2) Overall energy consumption of wireless sensor networks.

The simulation parameters assumed are as follow:

The network consists of 2500 sensor nodes uniformly distributed in matrix of 50x50, all the sensor nodes are stationary and initially have same energy. Initially energy of each sensor node is 2J, power consumption while data transmission is 600W, power consumption while receiving advertisement messages and while requesting for data is 200mW.

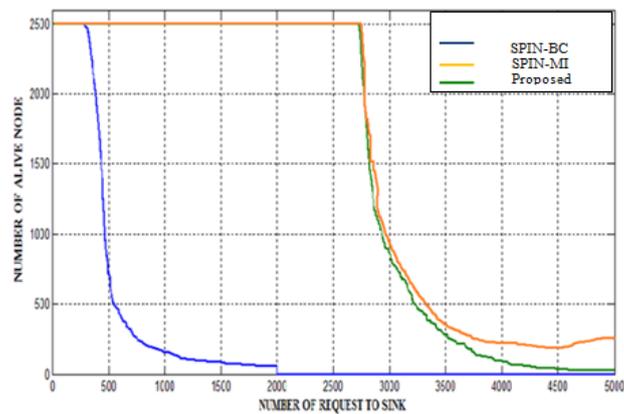


Fig1. Number of Alive Node in the Sensor Network

Fig1 represents the number of alive nodes after each request to sink in a sensor network of 2500 sensor nodes completed. A node is alive if its current energy value is capable of completing all three phases of communication. After 2000 requests made by source node to sink node, SPIN network goes down and it is not capable of decimating more data in the network. After 2000 requests made the number of alive nodes in E-SPIN are 2500 and its entire nodes are capable of decimating information. E-SPIN uses energy of sensor nodes more efficiently, which enhance the network life time.

The result of fig 2 shows that nodes are not capable of forwarding the data for 248th request in case of SPIN-BC protocol because energy of all the neighbor nodes of advertising node was consumed in previous requests completion. However in case of E-SPIN 248th request is fulfilled and overall energy consumption at that point is far much less than that of energy consumed in SPIN and sensor network is capable of fulfill the request made after the completion of 248 requests. From this we concluded that E-SPIN is using energy more efficiently.

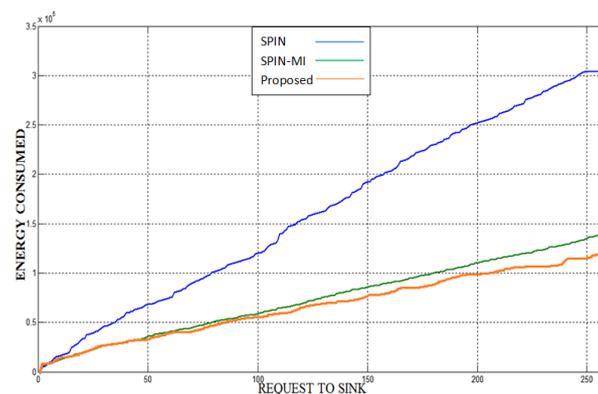


Fig2.Overall Energy Consumption of Sensor Network

VI. CONCLUSION

The proposed protocol E-SPIN is suitable for application like alarm monitoring which need quick response. Proposed model uses the distance of nodes from sink node and neighbor node with maximum energy among the set of neighbor nodes which are nearer to sink node in comparison to advertising node is selected to forward the data by keeping unrequired nodes in sleep mode. This protocol is very good solution to solve the problems of “Blind Forward” and “Data Unaccessible”.

VII. FUTURE WORK

The proposed model is energy efficient, but if the requests are made in same region again and again the energy of particular region of the network goes down, which results in the formation of different clusters in the network having varying energy. So this may cause to go down the network’s portion, while the rest of network has sufficient energy to carry on the dissemination of data in the network.

REFERENCES

- [1] F.Akyildiz, W.Su, Y.ankarasubramaniam, and E.cayirci, “A survey on sensor networks,” IEEE Communication Magazine, Volume: 40 Issue: 8, pp.102-114, August 2002.
- [2] G. Potti and W. Kaiser, Wireless Sensor Network. Communication of the ACM, 43(5):51-58, may 2000.
- [3] V.D. Park and M.S. Corson, “Ahighly adaptive distributed routing algorithm for mobile wireless networks,” in IEEE INFOCOM’897, 189897, pp, 1405-1413.
- [4] “21 ideas for 21st century” Business Week, pp. 78-167, Aug. 30, 1999.
- [5] J. Kuik, W. Heinzeman, and Baakrishna, “Negotiation-based protocol for disseminating information in wireless sensor network,” Wireless Networks, vol.8, pp. 169-185, 2002.
- [6] J.N. Al-Karki, A.E. Kama: Routing Techniques in Wireless Sensor Networks: A Survey. IN: IEEE Wireless Communications, Vol. 11, no.1, pp.6-28, 2004.
- [7] F. Wu, and. Li. “Research on SPIN of wireless sensor networks,” computer and modernization, vol. 3, pp. 93-96, 2007.
- [8] W. Herzelman, and J.Kulik, “Adaptive protocols for information dissemination in wireless sensor networks,” ACM/IEEE Mobicom Conference, Seattle, WA, August, 1999, pp. 174-185.

2nd International Conference on Recent Innovations in Science, Engineering and Management

JNU Convention Center, Jawaharlal Nehru University, New Delhi

22 November 2015 www.conferenceworld.in

(ICRISEM-15)

ISBN: 978-81-931039-9-9

- [9] Luwei Jing, Feng Liu and Yuling Li, "Energy saving routing algorithm based on SPIN protocol in WSN".IN: IEEE Wireless Communication, pp. 416-419, 2011.
- [10] ZeenatRehena, Sarabhi Roy, Nandini Mukherjee, "A Modified SPIN for Wireless Sensor Networks". IN: IEEE Wireless Communication, pp.1-4, 2011.
- [11] Pandey Sudhakar and Pal Pankaj , "Spin-MI: Energy Saving Routing Algorithm Based on SPIN Protocol in WSN".National Academy Science Letters, volume 37,number 4,doi=10.1007/s40009-014-0232-9}