

FLOOD MANAGEMENT – A CASE STUDY OF CHENNAI CITY FLOOD 2015

Ajay Kumar, Chandramesh Kumar Harshawardhan, Ketan pal

Department of Civil Engineering, IIMT College of Engineering, Greater Noida

ABSTRACT

In the recent decades, Indian cities are witnessing devastating floods more often due to heavy rainfall, cyclones, etc., Flood impact is one of the most significant disasters in the world. More than half of global flood damages occur in Asia. Causes of floods are due to natural factors such as heavy rainfall, high floods and high tides, etc., and human factors such as blocking of channels or aggravation of drainage channels, improper land use, deforestation in headwater regions, etc. Floods result in losses of life and damage properties. Population increase results in more urbanization, more impervious area and less infiltration and greater flood peak and runoff. Problems become more critical due to more severe and frequent flooding likely caused by climate change, socio-economic damage, population affected, public outcry and limited funds. Chennai, one of the fast growing metros is likely affected by the lack of drainage mainly due to uncontrolled developments of concrete spaces, encroachment of major drainage channels, shrinking of marshlands, etc., Though Urbanization, the vital factor of response for the flood risks is coupled with the climatic variability and ecological imbalances. The paper discusses causative factors responsible for flood risks in Chennai, the immediate need for proper flood risk reduction and management strategies.

I. PROLOGUE OF CHENNAI

Chennai, State capital of Tamil Nadu lies in the Eastern Coast of South India where three watercourses meanders through it namely, Cooum River, Adyar River and Buckingham Canal. Chennai is the fourth largest Metropolitan in India having a total population of nearly 47 Lakhs¹ with a growth rate of 13% and density of 26903. Within a century, Chennai has grown 8 fold times in population (*Figure 1*).

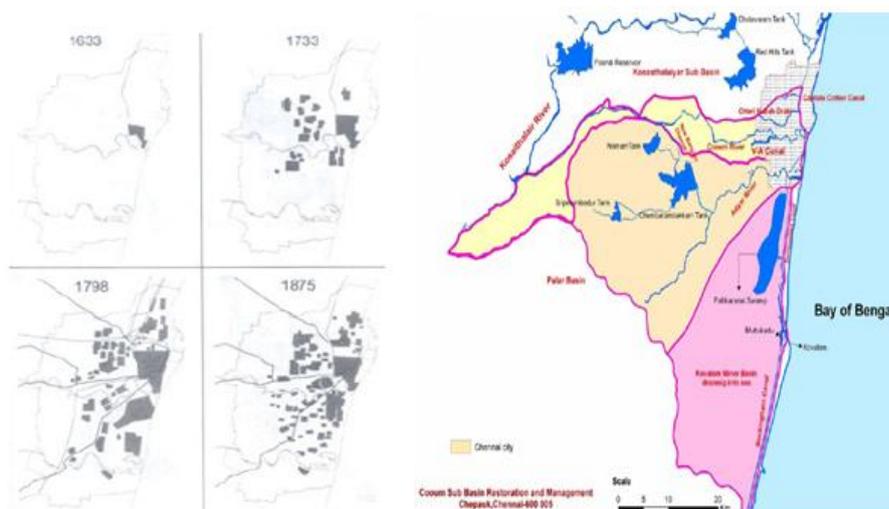


Figure 1. Growth of Chennai City Figure 2. Rivers & Drainage Systems of CMA

1.1. Growth of Chennai City

Chennai, having a plain terrain is bounded by Bay of Bengal in the East with an average elevation 6.7m from the mean sea level. Chennai experiences most of its rainfall during October to December associated with Depressions & frequent cyclones during this period. Average annual rainfall is about 1200 mm – 1300 mm being situated on the coastal side.

City is drained by those 2 rivers in addition to many major & minor drainage channels through Buckingham Canal to Sea (Figure 2). The city is also having more than 50 Temple tanks in addition to natural water bodies to capture flood water and acts as ground water recharging wells. Chennai also has Pallikaranai swamps, Madhavaram&Manalijheels, Adyar&Couum Estuaries as a wetland sources apart from natural & manmade waterbodies.

II. HISTORY OF CHENNAI FLOODS

Chennai frequently experiences flooding due to heavy rain associated with depressions & cyclones. Of which few catastrophic floods during 1976, 1985, 1996, 1998, 2005, 2008 and 2010 caused heavy damages. Now-a-days, unexpected holidays due to heavy downpour are quite common especially during October – December. In short, Chennai is not starving for rain; it is starving for water which is due to mismanagement of water storage. In 2010, Chennai received about 760mm rainfall only during October – December period. Recent highest rainfall in a day was 423 mm on 27.10.2005. All these shows whether Chennai is prepared to drain this flash flood without having hindrances in their day – today life? Closing of schools due to flooding every year is common in many parts of Chennai. Since it is more frequent every year why effective management is not so happened? Where is the lacuna? This article is aimed to arrive out the gaps in resolving the persistent issue

2.1. Causes of Chennai Floods (Table 1)

The following are the factors[1] which hamper the living in Chennai due to floods though it can be categorized broadly under changes in climate & micro-regional environmental factors. Each factor (*Table 1*) is dealt in detail in the subsequent clauses.

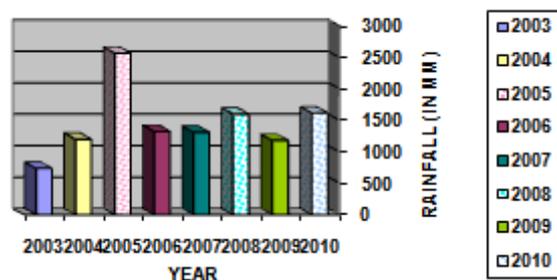


Fig. Average annual rainfall in Chennai.

2.2. Direct Factors

2.2.1. Increase in Rainfall

Chennai accounts to frequent flash floods due to consistent increase in the amount of rainfall also, out of which during 2005, 2008 & 2010 are considerable one (*Figure 3*).

The city gets most of its seasonal rainfall from the north–east monsoon winds during mid of October to mid of December. Cyclones in the Bay of Bengal also sometimes hit the city.

Table 1. Causes of Chennai Floods

CAUSES	TYPES OF FACTORS	ELEMENTS
Direct Factors	Increase in rainfall	Due to global climatic change
	Urbanization	Encroachment of all water bodies, wetlands, etc.,
		Construction of transportation networks all along the major watercourses
		Increase in concrete spaces which stops percolation of water into the Ground
		Decrease in open areas/green spaces
	Lack of Transportation facilities (esp. in slums)	
Topography	Plain terrain lacking natural gradient for free run-off	
Indirect Factors	Inadequate & poor drainage systems	Sewage systems were planned originally before 4 decades and only few minor modifications made which is far below the required capacity
		Heavy siltation all along the drainage channels
		Lack of coordination between the agencies
	Disposal of solid waste & other debris	Attitude of people
		Lack of management measures by the agencies
	Vehicle parking on roads	Increase in concrete spaces

2.2.2. Urbanization

Chennai with the fast pace of developments has witnessed a steady deterioration and decrease in the number of water bodies. It is estimated that more than half of the wetlands have been converted for other uses. Chennai had about 650² small and big water bodies in and around the city, but today the number has been reduced to less than 30. Ownership of water bodies is scattered among various government departments and is the root cause for lack of proper management. The Protection of Tanks and Eviction of Encroachment Act, came into effect from October 2007. However, there has been lack of implementation of this law.

This 65-year old map (*Figure 4*) shows the locations of several water bodies. The gray areas of the map represent eris, or small ponds. The gray water bodies are seasonal, in that they appear during the rainy seasons and remain dry during the rest of the year. When this map is compared with the recent one, it shows many of the water bodies have either shrunk or disappeared. According to records of the Water Resources Department (WRD), the area of 19 major lakes has been shrunk from a total of 1,130 hectares to nearly 645 hectares and hence reduced their storage capacity. Also, the ground water level came down up to 10m within 5 years (1995 – 2001)[6].

The drastic change in Land Use of Chennai[6] due to urbanization (1995 – 2007) also adds fuel to the current risk of flood in every year. The change in land cover during 1997 to 2001 is given in *Figure 5*. Most of the green cover are reduced to non-vegetative or a concrete space. Due to this, the surface run-off is too high and the infiltration capacity of land has gone down drastically. Due to the increase in impervious areas, Chennai experiences severity of floods during every heavy rainfall.



Figure 4. Map showing the locations of various water bodies located in and around Chennai before 65 years.

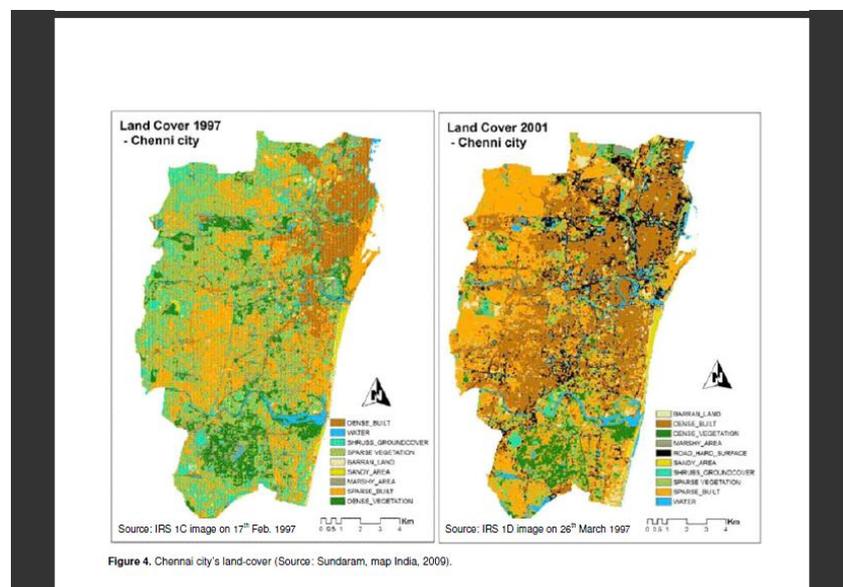


Figure 5. Chennai – City's Land Cover during 1997 & 2001 (Source: Sundaram Map, 2009)

2.2.3. Topography

Chennai has a terrain slope varying from 1:5000 to 1: 10000. It is a low-lying area and almost like a pancake. It rises slightly as the distance from the sea-shore increases but the average elevation of the city is not more than 22' above MSL, while most of the localities are just at sea-level and drainage in such areas remains a serious problem.

2.3. Indirect Factors

2.3.1. Inadequate and Poor Drainage Systems

Apart from plain terrain lacking natural gradient for free run-off, the sewage system was originally designed for about 6.5 lakhs population at 114 LPCD of water supply. Later it was modified during 1989-91 even then it has not reached the required capacity.

Due to dumping of garbage and massive reclamation, marshland especially in south Chennai has reduced to one-tenth of its size. Also, the government has built a slum resettlement colony along the river channel and multi-storeyed housing estates have come up which blocks the natural drainage of river basin into the sea. The original silting pattern was shifted due to the development. Planning of individual division oriented projects without involving associated authorities is the major drawback which is reflecting as a major gap from the institution side. Absence of accurate topographic map is worsening the situation more. Total waste water outfalls in water ways accounts to 85%. This is an alarming issue which has to be addressed immediately.

2.3.2. Solid Waste Disposal & Vehicle Parking on Roads

The highest per capita solid waste generation in India is in Chennai (0.6kg/day)³. Majority of solid wastes are dumped in a mixed form in low lying areas & in open areas by Chennai Corporation. Even though there is a proper system of collection, segregation & disposal of wastes, it is a serious environmental concern which has to be addressed separately. Chennai witnesses 425 new vehicles put on road every day causing pressure for motorable and parking space. Increase in impervious increasing the flood severity and later drought to follow. Increase in road space is accounting to only 3- 4% when comparing with the developed cities like London (20-25%).

III. MASTER PLAN & FLOOD MITIGATION IN CHENNAI – A QUICK REVIEW

Flood Alleviation Scheme funded by Government with a cost Rs.3000 million was launched in 1998 focusing mainly on structural measures with the objectives like adequacy of flow in the arterial drainage system, safeguard against tidal and fluvial flooding, removing impediments, relocation and rehabilitation of encroachers. Chennai City River Conservation Project which was launched in 2000 is aimed to improve the waterways, with an estimated outlay of Rs.17, 000 million. The Master Plan 1992–1993 incorporated Madras Metro Flood Relief/ Storm Water Drainage study outcomes in the form of structural and non-structural measures. Funds under JNNURM project have been visualized for implementation of underground sewerage schemes and detailed project reports are being developed. In 2010, the State Government has launched a massive flood mitigation project for the city, involving construction of new micro and macro drainage systems in four basins and making improvements to existing drainage, at a cost of Rs.1, 447 crores under JNNURM. The works like improvements works to divert surplus water, desiltation, strengthening existing city drainage network, etc.,

IV. FINDINGS & RECOMMENDATIONS

Both humans and nature put together the ground for the perennial flood tribulations. The immediate need is to create a *scientific inventory* of water bodies and delineate flood zones within the city. The flood zone will have

to be identified based on the location of the water bodies, natural drains, water shed area and it has to be made as a no building zone. More campaigns have to be conducted at the local level in order to *create awareness* to the public about the causative factors for the flood disasters. Wide-ranging management measures will help Chennai to be relieved from the recurrent flood menaces almost every monsoon.

REFERENCES

- [1.] <http://www.sciencedirect.com/science/article/pii/S1877705812012647>
- [2.] http://article.sapub.org/image/10.5923.j.arch.20120206.01_003.gif
- [3.] CMDA (2007), Master Plan - II for Chennai Metropolitan Area - 2026, March 2007, Chennai Metropolitan Development Authority, Tamil Nadu.
- [4.] CPREEC (2008), Urban Flood Studies for Chennai under NIDM Project, CPR Environmental Education Centre, Chennai.