

# **ENHANCEMENT OF TENSILE STRENGTH OF MECHANICAL PROPERTIES OF BANANA FIBER REINFORCED EPOXY COMPOSITES FILLED WITH GROUNDNUT SHELL ASH**

**Guruji Ramakrishna<sup>1</sup>, Dr. G. R. Selokar<sup>2</sup>**

<sup>1</sup>*Ph D Scholar, Mechanical Engineering, Sri SatyaSai University of Technology & Medical Sciences, Sehore, MP, (India)*

<sup>2</sup>*Ph D Supervisor, Sri SatyaSai University of Technology & Medical Sciences, Sehore, MP, (India)*

## **ABSTRACT**

*In the fast-developing world, the concern for the environmental pollution and the prevention of non-renewable and non-biodegradable resources has attracted researchers seeking to develop new eco-friendly materials and products based on sustainability principles. The fibers from the natural sources provide indisputable advantages over synthetic reinforcement materials such as low cost, low density, non-toxicity, comparable strength, and minimum waste disposal problems.*

*In the present work, banana fibre reinforced epoxy composites filled with groundnut shell ash was prepared and the mechanical properties of these composites are evaluated. The composite samples with different groundnut shell ash and epoxy weight fractions were prepared by using the hand lay-up process and apply pressure at room temperature. Later, the samples were tested for the evaluation of mechanical properties such as tensile strength, hardness, compressive strength and impact strength.*

**Keywords:** *Banana fibres, Resin, Groundnut Shell Ash.*

## **I.INTRODUCTION**

It is a truism that technological development depends on advances in the field of materials. One does not have to be an expert to realize the most advanced turbine or air-craft design is of no use if adequate materials to bear the service loads and conditions are not available. Whatever the field may be the final limitation on advancement depends on materials. Nature is full of examples where the idea of composite materials is used. Wood is a fibrous composite: cellulose fibres in a lignin matrix. The cellulose fibres have high tensile strength but are very flexible (i.e. low stiffness), while the lignin matrix joins the fibres and furnishes the stiffness. Bone is yet another example of a natural composite that supports the weight of various members of the body. It consists of short and soft collagen fibres embedded in a mineral matrix called apatite. In addition to these naturally occurring composites, there are many other engineering materials that are composites in a very general way and that have been in use for very long time.

## II.FABRICATION METHODS OF PMCS

There are two general divisions of composites manufacturing processes: open moulding and closed moulding. With open moulding, the gel coat and laminate are exposed to the atmosphere during the fabrication process. In closed moulding, the composite is processed in a two-part mould set, or within a vacuum bag. There are a variety of processing methods within the open and closed moulding categories.

### 2.1 Open Moulding Method

- (a) Hand Lay-Up.
- (b) Spray-Up.
- (c) Filament Winding.

#### (a) Hand Lay-Up

Hand lay-up is an open moulding method suitable for making a wide variety of composites products including: boats, tanks bath ware, housings, truck/auto components, architectural and many other products ranging from very small to very large. Production volume per mould is low; however, it is feasible to produce substantial production quantities using multiple moulds. Simple, single-cavity moulds of fibreglass composites construction are generally used. Moulds can range from very small to very large and are low cost in the spectrum of soft.


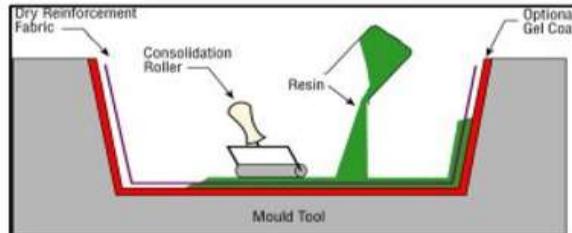


FIGURE2.1 Hand Lay-Up Technique

### 2.2 NATURAL FIBRES

#### 2.3 Structure Of Natural Fibre

The chemical structure of natural fibre or plant fibre comprises of cellulose, hemicellulose, lignin, pectin and extraneous materials. characterization of plant fibre can be done based on its cellular structure. each cell of fibre comprises of crystalline cellulose regions (microfibrils) which are interconnected via hemicellulose and lignin fragments. a natural fibre cell has one thin primary wall and three thick secondary walls . The primary wall is the first layer deposited during cell growth surrounding a secondary wall. the secondary wall consists of three layers and the thick middle layer controls the mechanical properties of the fibre. It is observed that the higher fibre strength takes place when the microfibrils are arranged more parallel to the fibreaxis .cellulose is the major framework component of the fibre and provides the strength, stiffness and structural stability of the fibre.

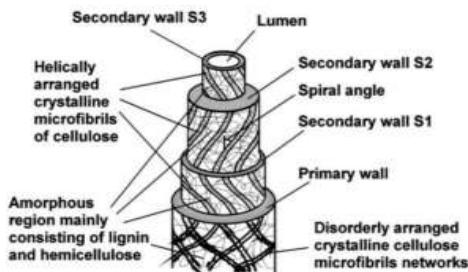

**FIGURE 2.3 Structure of natural fibre**

### **III.MATERIALS**

#### **3.1 Matrix Material**

In composite materials, the constituent which is continuous and present in greater quantity is called matrix. The main functions of the matrix are to hold or bind the fibre together, distribute the load evenly between the fibres and protect the fibre from the mechanical and environmental damage. Epoxy resins are unique among all the thermoset resins due to several factors. The distinct properties of epoxy such as high corrosion and chemical resistance, outstanding adhesion to various substrate, good thermal and mechanical properties, good electrical insulating properties, low shrinkage upon cure, and the ability to process under a variety of conditions make it suitable matrix material for the fibereinforced composite materials.



**FIGURE 3.1Epoxy LY556 & Hardener HY951**

### **IV.FIBRE MATERIAL**

In composites, the discontinuous phase is usually harder and stronger than the continuous phase and is called the reinforcement. In polymer composites, the reinforcing phase can either be fibrous or non-fibrous (particulates) in nature. In FRP composites, fibre acts as a reinforcing agent. Fibres are the load carrying members which provide strength, stiffness, thermal stability and other structural properties in FRP . If the fibres are derived from the natural resources like plants or some other living species, they are called natural fibres.



**FIGURE 4 Raw banana fibre**

#### **4.1. GROUNDNUT SHELL ASH**

Groundnut shells were kept in Electricalfurnance at 1400°C temperature for ½ hr to burn completely. After this ,burned groundnut shells are pulverised into ash. Then, the filler was dried in an oven at a temperature of 250 °C for 3 hrs.



**FIGURE 4.1 Ground nutshell ash**

#### **V.EXPERIMENTATION**

##### **5.1chemical Treatment Of Banana Fibres**

The fibres were immersed in the 1% NAOH solution for 30 min and then washed with tap water. The washed fibres are wiped with cloth and then placed in oven at 50°C for 45 min for complete removal of moisture.



**FIGURE 5.1 Banana fibres dipped in 1% NAOH solution**

##### **5.2Hand layup process**



**Ground nutshell ash mixed with epoxy**



**Hand layup process**



**Composite**

## **VI.MECHANICAL TESTS**

### **6.1TENSILE TEST**

The universal testing machine is used for to determine the mechanical properties like: strength and the stress, strain elongation of the given standard specimen made up of the different combinations. A universal testing machine is used to test the tensile stress and compressive strength of materials. It is named after the fact that it can perform many standard tensile and compression tests on materials, components, and structures. Here we have to check the strength of the composite which is in the standard cuboid in shape for the measuring of the tensile strength. We have taken the two specimen.



**Specimens**



**FIGURE 6.1 Universal testing machine**

# International Conference on Advance Studies in Engineering and Sciences

Sri Satya Sai University of Technology and Medical Sciences , Sehore (M.P.)


ICASES-17

2<sup>nd</sup> December 2017, www.conferenceworld.in

ISBN: 978-93-86171-83-2


S.NO	WEIGHT OF GROUNDNUT SHELL ASH (GRAMS)	MAXIMUM LOAD (kN)	LOAD AT BREAK (kN)	UTS (MPa)
1	0	2.72315	2.72	10.21
2	10	3.23015	3.23	12.02
3	15	2.79324	2.79	10.30
4	20	2.33734	2.33	8.61

TABLE 6.1Ultimate tensile strength readings

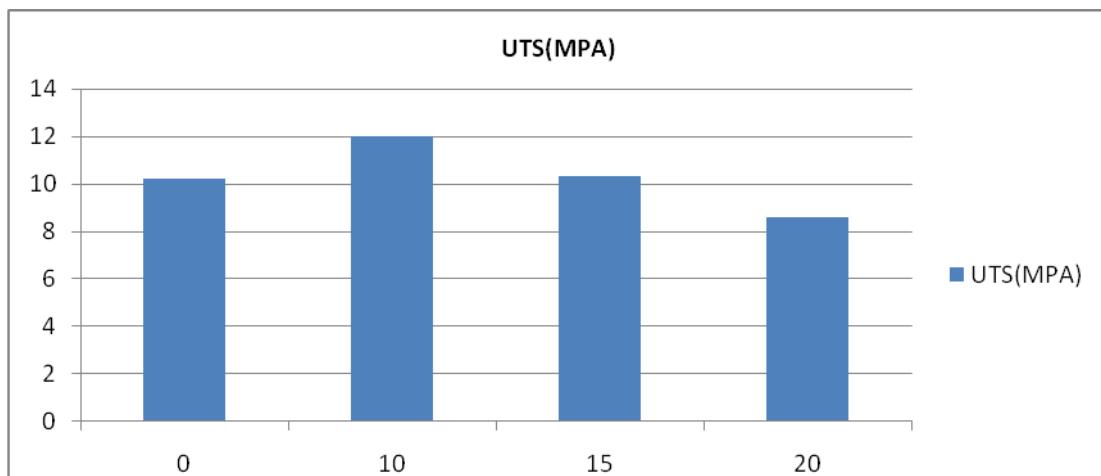


GRAPH 6.2Weight of groundnut shell ash vs Ultimate tensile strength


Tensile Stress vs Strain Diagram

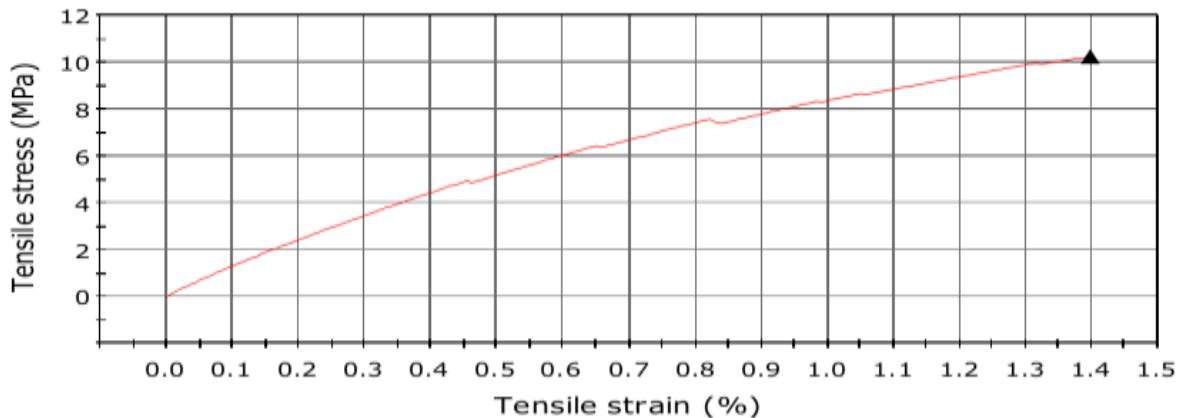


**FIGURE 6.3 Zero grams of groundnutshell ash tensile stress-strain graph**

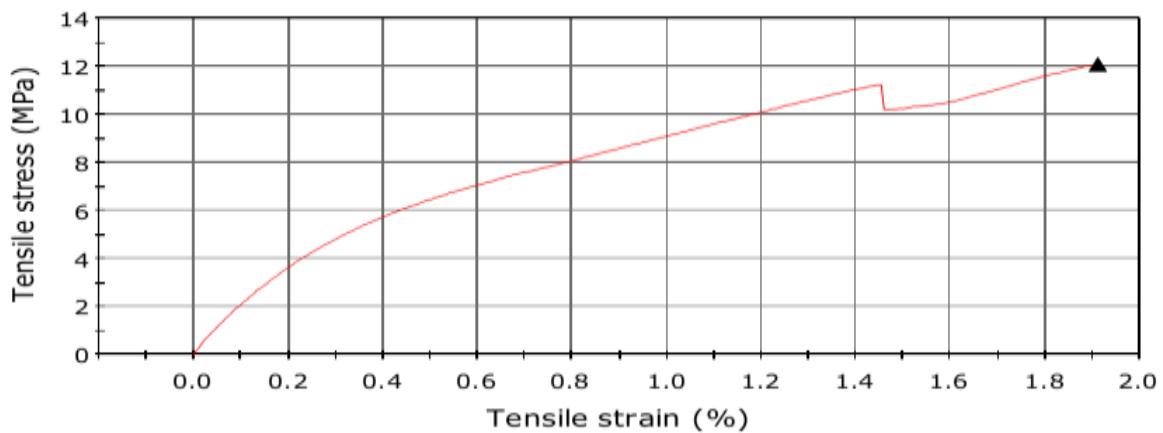

**FIGURE 6.4 Ten grams of groundnutshell ash tensile stress-strain graph**

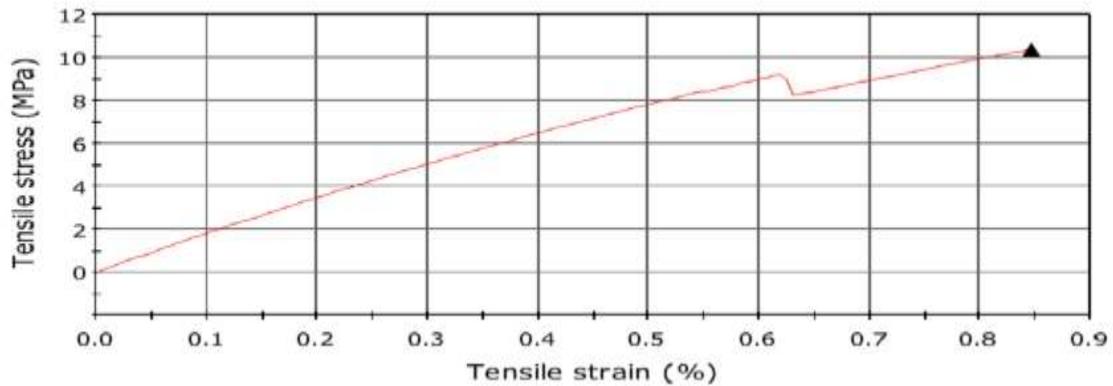

**FIGURE 6.5 Fifteen grams of groundnutshell ash tensile stress-strain graph**

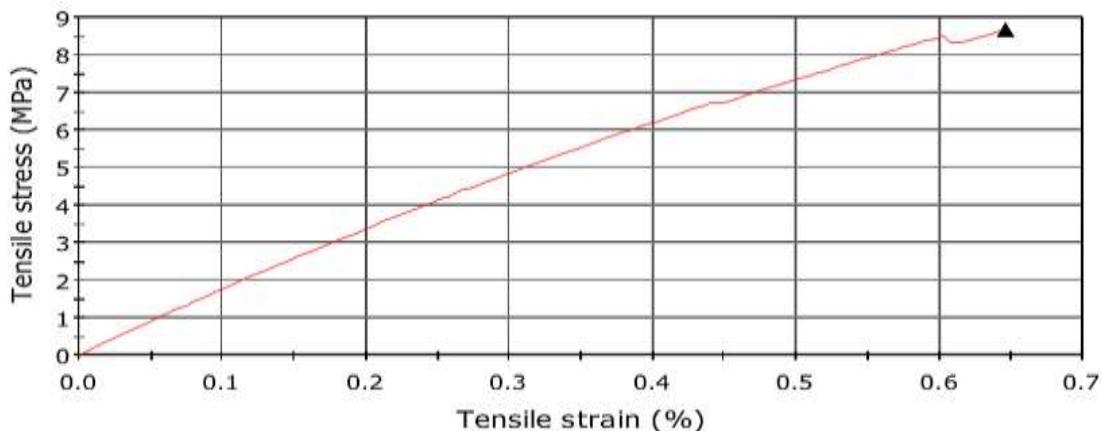

**FIGURE 6.6Twenty grams of groundnut shell ash tensile stress-strain graph**

## **VII.CONCLUSION**

The mechanical tests of all the four specimens were evaluated. The experimental investigation on the composites with different weight ratios have been carried out. The conclusions drawn from the present work are:

→ 240gm of epoxy + 45gms of banana mats+ 10gms of groundnut shell shows high tensile strength of 12.02 MPa among other proportions.

## **REFERENCES**

- [1.] Xess, P.A., Erosion Wear Behaviour of Bamboo Fibre Based Hybrid Composites, Thesis, NIT Rourkela,(2012).
- [2.] John, M. J., &Anandjiwala, R. D. (2008). Recent developments in chemical modification and characterization of natural fibre-reinforced composites. *Polymer composites*, Vol. 29(2), pp. 187-207.
- [3.] Opricovic, S., &Tzeng, G. H. (2004). Compromise solution by MCDM methods: A comparative analysis of VIKOR and TOPSIS. *European Journal of Operational Research*, Vol.156(2), pp. 445-455.
- [4.] Biswas S., Kindo S., Patnaik A., (2011). Effect of Length on Coir Fibre Reinforced EpoxyComposites, *Fibre and Polymers 12*, pp. 73-78.
- [5.] Lundquist, L., Marque, B., Hagstrand, P. O., Leterrier, Y. & Manson, J. A. E. (2003). Novel pulp fibre reinforced thermoplastic composites. *Composites Science and Technology*, Vol.63(1), pp. 137-152.
- [6.] Gowda, T. M., Naidu, A. C. B., &Chhaya, R. (1999). Some Mechanical Properties of Untreated Jute Fabric-Reinforced Polyester Composites. *Composites Part A: Applied Science and Manufacturing*, Vol.30(3), pp. 277-284.
- [7.] Monteiro, S. N., Terrones, L. A. H. &D'Almeida, J. R. M. (2008).Mechanical performance of coir fibre/polyester composites. *Polymer Testing*, Vol. 27(5), pp. 591- 595.

# **International Conference on Advance Studies in Engineering and Sciences**

**Sri Satya Sai University of Technology and Medical Sciences , Sehore (M.P.)**

**ICASES-17**

**2<sup>nd</sup> December 2017, www.conferenceworld.in**

**ISBN: 978-93-86171-83-2**

[8.] Luo, S. & Netravali, A. N. (1999). Mechanical and thermal properties of environmentallyfriendly green composites made from pineapple leaf fibres and poly (hydroxybutyrate-covalerate) resin. *Polymer Composites*, Vol. 20(3), pp. 367-378.

[9.] Amash, A. &Zugenmaier, P. (2000). Morphology and properties of isotropic and orientedsamples of cellulose fibre-polypropylene composites. *Polymer*,Vol. 41(4), pp.1589-1596.

[10.] Joseph, K., Thomas, S.&Pavithran, C. (1992). Viscoelastic properties of short-sisal-fibrefilledlow-density polyethylene composites: effect of fibre length and orientation. *Materials Letters*, Vol.15, pp. 224-228.